


ACUAFLEX

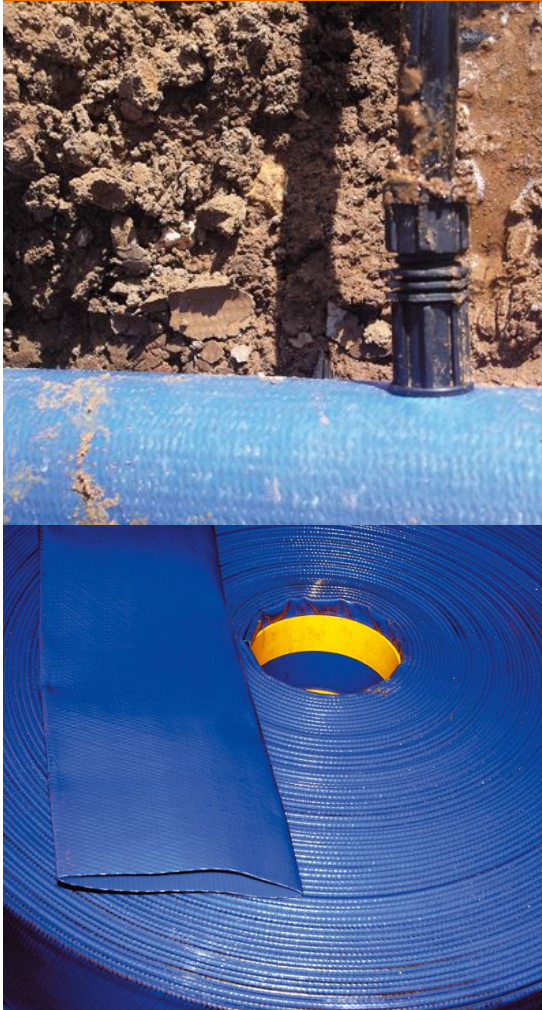

APLICACIONES

- Transfer of water at up to 5 bar
- Drop-wise irrigation systems
- Liquid fertilisers
- Protection sleeves

CHARACTERISTICS

Composition: Single layer lay- flat PVC hose. Polyester textile reinforcement.

Characteristics: Maximum resistance to the elements.

Service Temperature: >From 0 °C to +60 °C

Standard Length: 100 m rolls up to 153 mm in diameter. 50 m rolls from 153 mm upwards.

Identification: Smooth internal and external surface. Blue colour and marked ACUAFLEX HD



Code	Nominal diameter		Service/Bursting Pressure	Roll length	Maximum flow rate
	mm.	Inches			
*01428	40	1 1/2	5 / 15	100	9.000
01429	50	2	5 / 15	100	16.000
-	63	-	4 / 15	100	24.000
01430	65	2 1/2	4 / 15	100	25.000
01431	70	-	4 / 14	100	30.000
01432	77	3	4 / 12	100	38.000
01433	90	3 1/2	3 / 10	100	50.000
01434	100	-	3 / 10	100	60.000
01435	103	4	3 / 10	100	62.000
01440	103 R	4	4 / 12	100	62.000
01436	110	-	2 / 7	100	76.000
01437	127	5	2 / 7	100	100.000
-	127 R	-	2,5 / 2,5	100	100.000
01438	153	6	1,8 / 7	50 y 100	150.000
01439	204	8	1,5 / 5	50	250.000

Values in blue: reinforced versions.

* To order