

ACUAFLEX




APLICACIONES

- Lay- flat extra reinforced PVC hose.
- Transfer of water at up to 10 bar pressure

CHARACTERISTICS

- **Composition:** Lay- flat extra reinforced PVC hose.
 - **Characteristics:** Maximum resistance to the elements.
 - **Service Temperature:** >From 0 °C to +60 °C
 - **Standard Length:** 50 m and 100 m
 - **Identification:** Smooth internal and external surface.
 - **Colour:** Brown.
- Service Pressure:** 6 to 10 bar depending on diameter.

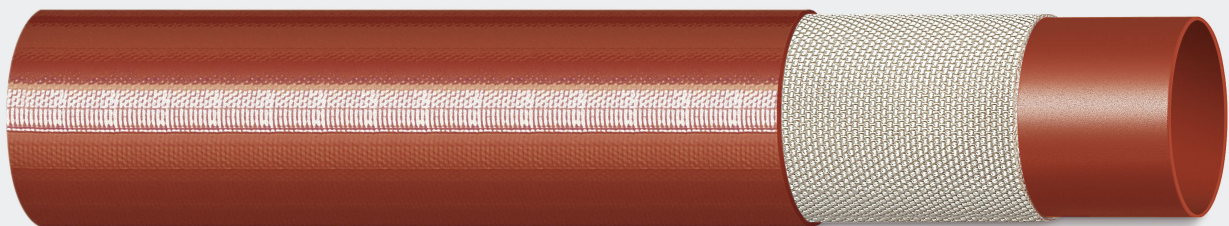

Code	Nominal diameter		Service/Bursting Pressure bar	Roll length m.	Maximum flow rate liters / hour
	mm.	Inches			
*01490	40	-	10/ 30	100	9.000
01491	52	2	9,5/ 29	100	16.000
01492	65	2 1/2	8,5/ 26	100	25.000
01493	77	3	8/ 24	100	38.000
01494	103	4	8/ 24	100	62.000
*01495	153	6	6/ 18	50	150.000

* To order